


产品描述 Description



含插销套件
Connectors included

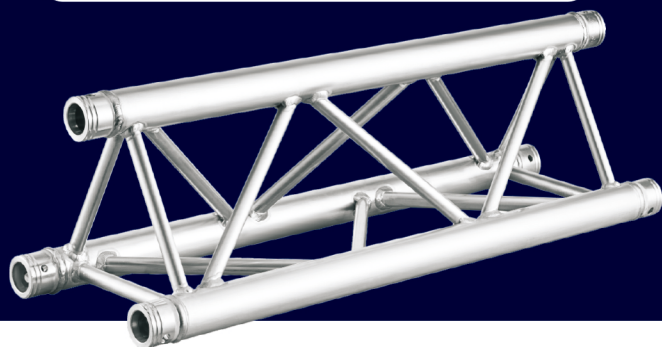

插销式桁架F33系列 Spigot Truss F33 Series



主管: 50x2mm(2x0.08 inch)

斜管: 20x2mm(0.8x0.08 inch)

铝合金: EN-AW 6082 T6

Main tube: 50x2mm(2x0.08 inch)


Braces: 20x2mm(0.8x0.08 inch)

Alloy: EN-AW 6082 T6

产品描述 Description	产品型号 Item Number	长度 Length	重量 Weight	规格 Specification	包装尺寸 Package(LxWxHcm)
		m	kgs	mm	
F33直架 TRIANGLE STRAIGHT SEGMENT	F33-50	0.5	2.80	257.8x290	30x26.7x50
	F33-100	1	6.00	257.8x290	30x26.7x100
	F33-150	1.5	8.00	257.8x290	30x26.7x150
	F33-200	2	10.20	257.8x290	30x26.7x200
	F33-250	2.5	12.20	257.8x290	30x26.7x250
	F33-300	3	13.80	257.8x290	30x26.7x300
	F33-350	3.5	15.72	257.8x290	30x26.7x350
	F33-400	4	17.64	257.8x290	30x26.7x400
	F33-450	4.5	19.58	257.8x290	30x26.7x450
	F33-500	5	20.04	257.8x290	30x26.7x500

承载表 LOADING TABLE

Span(m)跨度	2m	4m	6m	8m	10m	12m
Distrib.Load(kg/m)每米均布承重	761	206	92	51	31	20
Deflection(mm)变形量	2.6	11.5	26.8	48.8	75.2	105.6
Point Load(kg)中心点载	761	412	277	206	154	117
Deflection(mm)变形量	2.1	9.3	21.7	39.8	62	88.3



F33-C20

长度(L) 1m (3.28ft)
角度(A) 2-way 60° corner
重量(W) 5.4kgs(11.90lbs)



F33-T39

长度(L) 0.5m (1.64ft)
角度(A) 3-way vertical T-junction
重量(W) 5.3kgs(11.68lbs)