


产品描述
Description

插销式桁架HT33系列
Spigot Truss HT33 Series


主管: 50x3mm(2x0.12 inch)
斜管: 20x2mm(0.8x0.08 inch)
铝合金: EN-AW 6082 T6
Main tube: 50x3mm(2x0.12 inch)
Braces: 20x2mm(0.8x0.08 inch)
Alloy: EN-AW 6082 T6

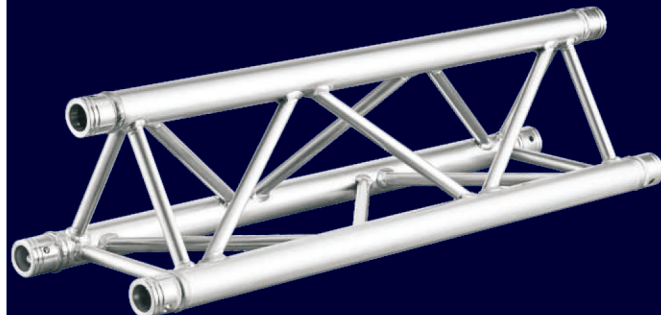

产品描述 Description	产品型号 Item Number	长度 Length	重量 Weight	规格 Specification	包装尺寸 Package(LxWxHcm)
		m	kgs	mm	
HT33直架 TRIANGLE STRAIGHT SEGMENT	HT33-50	0.5	3.25	257.8x290	30x26.7x50
	HT33-100	1	6.96	257.8x290	30x26.7x100
	HT33-150	1.5	9.28	257.8x290	30x26.7x150
	HT33-200	2	11.83	257.8x290	30x26.7x200
	HT33-250	2.5	14.15	257.8x290	30x26.7x250
	HT33-300	3	16.01	257.8x290	30x26.7x300
	HT33-350	3.5	18.24	257.8x290	30x26.7x350
	HT33-400	4	20.46	257.8x290	30x26.7x400
	HT33-450	4.5	22.71	257.8x290	30x26.7x450
	HT33-500	5	23.25	257.8x290	30x26.7x500


承载表 LOADING TABLE

Span(m)跨度	2m	4m	6m	8m	10m	12m
Distrib.Load(kg/m)每米均布承重	1231	338	150	81	50	32
Deflection(mm)变形量	2.9	12.8	29.4	51.7	80.6	112.7
Point Load(kg)中心点载	1321	675	450	324	249	190
Deflection(mm)变形量	2.5	10.3	23.7	42.1	66.1	93.5




HT33-C19

长度(L)	1m (3.28ft)
角度(A)	2-way 45° corner
重量(W)	6.4kgs(14.11lbs)




HT33-C21

长度(L)	0.5m (1.64ft)
角度(A)	2-way 90° corner
重量(W)	4kgs(8.82lbs)




HT33-C22

长度(L)	0.5m (1.64ft)
角度(A)	2-way 120° corner
重量(W)	4.7kgs(10.36lbs)

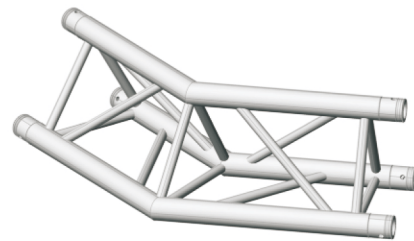


HT33-C23

长度(L)	0.5m (1.64ft)
角度(A)	2-way 135° corner
重量(W)	4.8kgs(10.58lbs)




HT33-C25

长度(L)	0.5m (1.64ft)
角度(A)	2-way 90° corner apex out
重量(W)	4.5kgs(9.92lbs)




HT33-C33

长度(L)	0.5m (1.64ft)
角度(A)	3-way 90° corner apex down right
重量(W)	6.5kgs(14.33lbs)



HT33-T36

长度(L)	0.5m (1.64ft)
角度(A)	3-way horizontal T-junction
重量(W)	5.5kgs(12.13bs)



HT33-T38

长度(L)	0.5m (1.64ft)
角度(A)	3-way vertical T-junction apex down
重量(W)	6.4kgs(14.11lbs)