

产品描述
Description

HT44直架
BOX STRAIGHT
SEGMENT


含插销套件
Connectors included

插销式桁架HT44系列
Spigot Truss HT44 Series

TUV
SUD

主管: 50x3mm(2x0.12 inch)
斜管: 25x3mm(1x0.12 inch)
铝合金: EN-AW 6082 T6


Main tube: 50x3mm(2x0.12 inch)
Braces: 25x3mm(1x0.12 inch)
Alloy: EN-AW 6082 T6

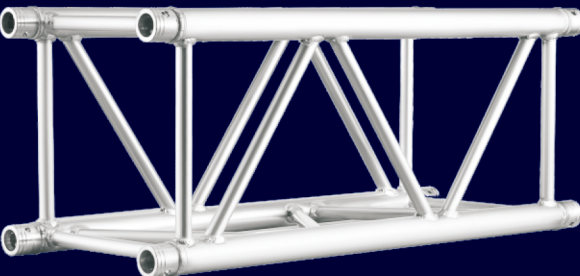

产品描述 Description	产品型号 Item Number	长度 Length	重量 Weight	规格 Specification	包装尺寸 Package(LxWxHcm)
		m	kgs	mm	
HT44直架 BOX STRAIGHT SEGMENT	HT44-50	0.5	7.80	400x400	41x41x50
	HT44-100	1	11.20	400x400	41x41x100
	HT44-150	1.5	15.90	400x400	41x41x150
	HT44-200	2	19.98	400x400	41x41x200
	HT44-250	2.5	23.58	400x400	41x41x250
	HT44-300	3	28.14	400x400	41x41x300
	HT44-350	3.5	32.10	400x400	41x41x350
	HT44-400	4	36.06	400x400	41x41x400
	HT44-450	4.5	39.54	400x400	41x41x450
	HT44-500	5	43.88	400x400	41x41x500


承载表 LOADING TABLE

Span(m)跨度	2m	4m	6m	8m	10m	12m	14m	16m
Distrib.Load(kg/m)每米均布承重	2327	901	417	243	162	112	82	61
Deflection(mm)变形量	1.3	8	18.9	35.4	58.8	86.5	119.8	158.7
Point Load(kg)中心点载	3267	1803	1252	971	811	675	573	477
Deflection(mm)变形量	1.4	6.4	15.2	28.5	47.6	70.5	98.3	127.8




HT44-C19

长度(L)	1.5m (4.92ft)
角度(A)	2-way 45° corner
重量(W)	15.1kgs(33.29lbs)




HT44-C20

长度(L)	1m (3.28ft)
角度(A)	2-way 60° corner
重量(W)	12.1kgs(26.68lbs)




HT44-C21

长度(L)	0.5m (1.64ft)
角度(A)	2-way 90° corner
重量(W)	8.1kgs(17.86lbs)




HT44-C23

长度(L)	0.5m (1.64ft)
角度(A)	2-way 135° corner
重量(W)	8.5kgs(18.74lbs)




HT44-T35

长度(L)	0.5*0.6m (1.64*1.97ft)
角度(A)	3-way T-junction
重量(W)	9.7kgs(21.38lbs)




HT44-T42

长度(L)	0.5*0.5*0.6m (1.64*1.64*1.97ft)
角度(A)	4-way T-Junction
重量(W)	12.3kgs(27.12lbs)




HT44-C22

长度(L)	0.5m (1.64ft)
角度(A)	2-way 120° corner
重量(W)	8.4kgs(13.89lbs)



HT44-C30

长度(L)	0.5m (1.64ft)
角度(A)	3-way 90° corner
重量(W)	11kgs(24.25lbs)



HT44-C41

长度(L)	0.6m (1.97ft)
角度(A)	4-way cross junction
重量(W)	10.6kgs(23.37lbs)



HT44-C

长度(L)	Circle
角度(A)	Various diameters