


FTB-L 直架
STRAIGHT SEGMENT



产品描述 Description

螺丝式桁架 FTB-L Bolted Truss FTB-L Series

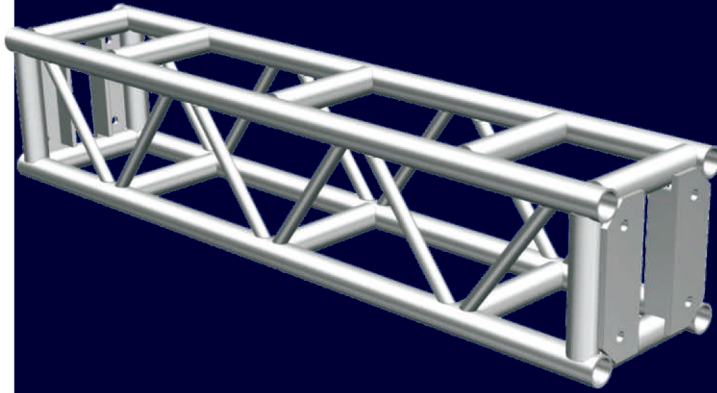

主管: 50x3mm(2x0.12 inch)

斜管: 25x3mm(1x0.12 inch)

铝合金: EN-AW 6082 T6

Main tube: 50x3mm(2x0.12 inch)

Braces: 25x3mm(1x0.12 inch)

Alloy: EN-AW 6082 T6

产品描述 Description	产品型号 Item Number	长度 Length	重量 Weight	规格 Specification	包装尺寸 Package(LxWxHcm)
		m	kgs	mm	
FTB-L直架 STRAIGHT SEGMENT	FTB-L-5	1.524	15.4	305x305	31x31x154
	FTB-L-8	2.438	22.6	305x305	31x31x245
	FTB-L-10	3.048	26.9	305x305	31x31x306

承载表 LOADING TABLE


Span(m)跨度	1.52m	3.05m	4.57m	6.1m	7.6m	9.14m	12.2m
Distrib.Load(kg/m)每米均布承重	1512	605	342	187	116	77	38
Deflection(mm)变形量	0.6	3.6	10.6	18.9	29.6	42.8	77
Point Load(kg)中心点载	1149	922	782	571	442	353	234
Deflection(mm)变形量	0.5	3.3	9.7	17.3	27.2	39.3	71.1

角度(A)

重量(W)

Connection Box multiple ways

11.6kgs (25.49lb)



FTB-L-CB-6