


HT6040直架
STRAIGHT SEGMENT

产品描述 Description

螺丝式桁架 HT6040

Bolted Truss HT6040 Series

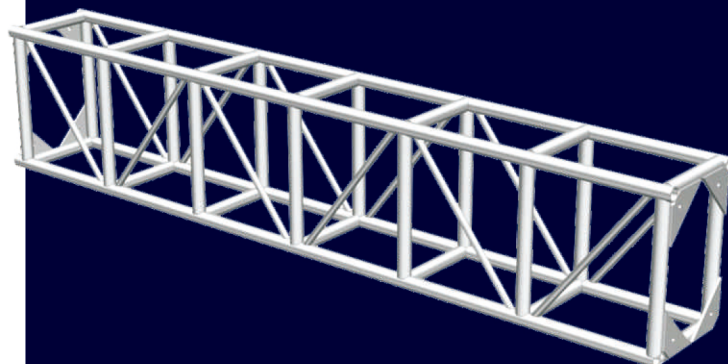

主管: 50x3mm(2x0.12 inch)

主管: 50x3mm(2x0.12 inch)

斜管: 25x3mm(0.98x0.12 inch)

铝合金: EN-AW 6082 T6

Main tube: 50x3mm(2x0.12 inch)

Vice tube: 50x3mm(2x0.12 inch)

Braces: 25x3mm(0.98x0.12 inch)

Alloy: EN-AW 6082 T6

产品描述 Description	产品型号 Item Number	长度 Length	规格 Specification	包装尺寸 Package(LxWxHcm)
		m	mm	
HT6040 直架 STRAIGHT SEGMENT	HT6040-100	1	400x600	41x61x100
	HT6040-200	2	400x600	41x61x200
	HT6040-300	3	400x600	41x61x300

承载表 LOADING TABLE


Span(m)跨度	6m	8m	10m	12m	13m	14m	15m	16m	17m	18m	19m	20m
Distrib.Load(kg/m)每米均布承重	424.9	250.5	172.5	131.1	113	94.3	80.1	66.1	53.1	37.7	30	21.2
Deflection(mm)变形量	13	29	45	65	75	85	95	105	115	125	135	145
Point Load(kg)中心点载	1529.7	1051.9	862.6	786.7	734.6	660.2	600.7	528.4	451	339.3	284.7	212.1

长度 (L)

0.6m

角度 (A)

Connection Box multiple ways



HT6040-MCB-4