


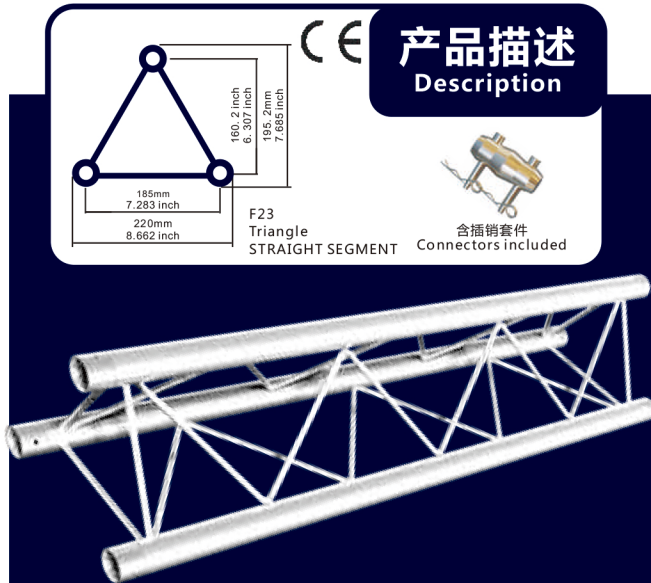

产品描述 Description

插销式桁架F23系列 Spigot Truss F23 Series

主管: 35x2mm(1.4x0.08 inch)

斜管: $\Phi 8$ mm(0.3 inch)

铝合金: EN-AW 6082 T6

Main tube: 35x2mm(1.4x0.08 inch)


Braces: $\Phi 8$ mm(0.3 inch)

Alloy: EN-AW 6082 T6

产品描述 Description	产品型号 Item Number	长度 Length	重量 Weight	规格 Specification	包装尺寸 Package(LxWxHcm)
		m	kgs	mm	
F23直架 TRIANGLE STRAIGHT SEGMENT	F23-50	0.5	2.20	195.2x220	23x20.5x55
	F23-100	1	3.22	195.2x220	23x20.5x105
	F23-150	1.5	4.35	195.2x220	23x20.5x155
	F23-200	2	5.74	195.2x220	23x20.5x205
	F23-250	2.5	6.80	195.2x220	23x20.5x255
	F23-300	3	8.06	195.2x220	23x20.5x305
	F23-350	3.5	9.38	195.2x220	23x20.5x355
	F23-400	4	10.08	195.2x220	23x20.5x405


承载表 LOADING TABLE

Span(m)跨度	2m	3m	4m	6m	8m	10m
Distrib.Load(kg/m)每米均布承重	175	114	64	27	14	8
Deflection(mm)变形量	1.5	4.9	8.9	20.1	36	56.8
Point Load(kg)中心点载	262	171	127	81	56	41
Deflection(mm)变形量	1.8	4	7.2	16.5	30	48.3

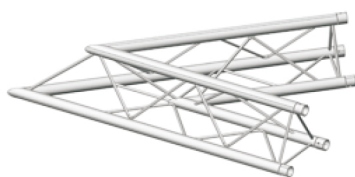


F23-C19

长度(L)	1m (3.28ft)
角度(A)	2-way 45° corner
重量(W)	2.6kgs(5.73lbs)



F23-T37

长度(L)	0.5m (1.64ft)
角度(A)	3-way vertical T-junction apex up
重量(W)	2.4kgs(5.29lbs)



F23-C53

长度(L)	0.5m (1.64ft)
角度(A)	5-way cross junction apex down
重量(W)	3.2kgs(7.05lbs)