


FTB-H 直架
STRAIGHT SEGMENT

产品描述 Description

螺丝式桁架 FTB-H

Bolted Truss FTB-H Series

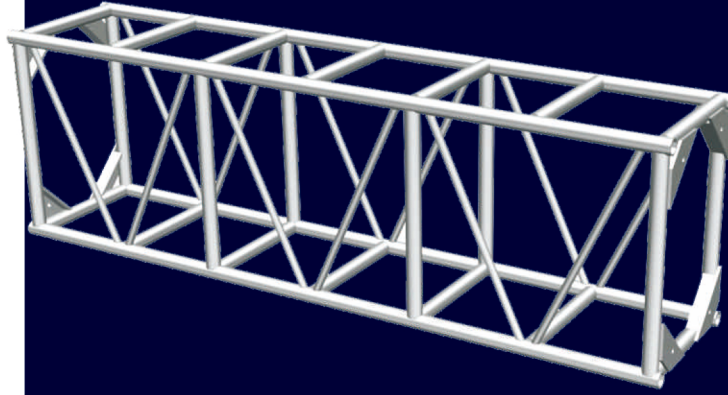

主管: 50x3mm(2x0.12 inch)

副管: 50x3mm(2x0.12 inch)

斜管: 25x3mm(0.98x0.12 inch)

铝合金: EN-AW 6082 T6

Main tube: 50x3mm(2x0.12 inch)

Vice tube: 50x3mm(2x0.12 inch)

Braces: 25x3mm(0.98x0.12 inch)

Alloy: EN-AW 6082 T6

产品描述 Description	产品型号 Item Number	长度 Length	重量 Weight	规格 Specification	包装尺寸 Package(LxWxHcm)
		m	kgs	mm	
FTB-H 直架 STRAIGHT SEGMENT	FTB-H-5	1.524	30.5	520x762	77.2x53x154
	FTB-H-8	2.438	40.2	520x762	77.2x53x245
	FTB-H-10	3.048	48.7	520x762	77.2x53x306

承载表 LOADING TABLE


Span(m)跨度	1.52m	3.05m	4.57m	6.1m	7.6m	9.14m	12.2m
Distrib.Load(kg/m)每米均布承重	1982	980	649	482	382	272	145
Deflection(mm)变形量	0.1	0.8	2.5	6	11.8	17.6	31.5
Point Load(kg)中心点载	3013	2989	2594	1922	1516	1241	887
Deflection(mm)变形量	0.2	1.4	4	7.2	11.2	16.2	29

角度(A)

重量(W)

Connection Box multiple ways

15.8kgs (35lb)



FTB-H-CB-4