


HT4040 直架
STRAIGHT SEGMENT

产品描述 Description

螺丝式桁架 HT4040 Bolted Truss HT4040 Series

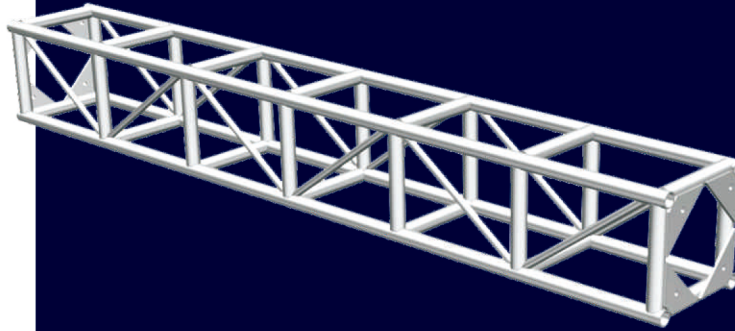

主管: 50x3mm(2x0.12 inch)

副管: 50x3mm(2x0.12 inch)

斜管: 25x3mm(0.98x0.12 inch)

铝合金: EN-AW 6082 T6

Main tube: 50x3mm(2x0.12 inch)

Vice tube: 50x3mm(2x0.12 inch)

Braces: 25x3mm(0.98x0.12 inch)

Alloy: EN-AW 6082 T6

产品描述 Description	产品型号 Item Number	长度 Length	规格 Specification	包装尺寸 Package(LxWxHcm)
		m	mm	
HT4040直架 STRAIGHT SEGMENT	HT4040-100	1	400x400	41x41x100
	HT4040-200	2	400x400	41x41x200
	HT4040-300	3	400x400	41x41x300

承载表 LOADING TABLE


Span(m)跨度	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m
Distrib.Load(kg/m)每米均布承重	443.5	321.3	233.7	174.6	127.3	113.7	95.5	78.6	64.5	53.9	44.1	37.9
Deflection(mm)变形量	15	22	30	40	52	62	75	88	100	115	128	145
Point Load(kg)中心点载	1452.3	1159.8	1019.3	890.5	763.9	665.9	580.3	518.8	447.3	401.7	354.5	311.1

长度 (L)

0.4m

角度 (A)

Connection Box multiple ways



HT4040-MCB-6