

GS350直架
STRAIGHT SEGMENT



产品描述 Description




含插销套件
Connectors included

插销式桁架GS350系列 Spigot Truss GS350 Series

主管: 48x4.5mm(1.89x0.18 inch)
斜管: 25x3mm(1x0.12 inch)
铝合金: EN-AW 6082 T6

Main tube: 48x4.5mm(1.89x0.18 inch)
Braces: 25x3mm(1x0.12 inch)
Alloy: EN-AW 6082 T6

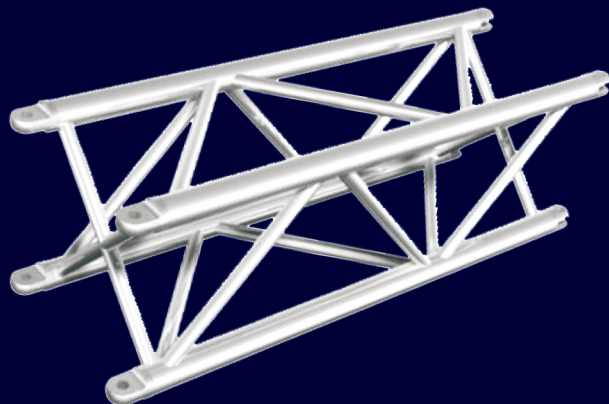

产品描述 Description	产品型号 Item Number	长度 Length	重量 Weight	规格 Specification	包装尺寸 Package(LxWxHcm)
		m	kgs	mm	
GS350直架 STRAIGHT SEGMENT	GS350-2FT	0.609	11	347x347	35.7x35.7x61
	GS350-4FT	1.219	15.5	347x347	35.7x35.7x122
	GS350-6FT	1.828	21	347x347	35.7x35.7x183
	GS350-8FT	2.438	27	347x347	35.7x35.7x244
	GS350-10FT	3.048	32	347x347	35.7x35.7x300
	GS350-12FT	3.657	35	347x347	35.7x35.7x366
	GS350-14FT	4.267	40	347x347	35.7x35.7x427

承载表 LOADING TABLE

Span(m)跨度	4m	6m	8m	10m	12m	14m	16m
Distrib.Load(kg/m)每米均布承重	995	436	240	150	100	71	52
Deflection(mm)变形量	9.2	20.7	36.8	57.7	83.3	113.9	149.4
Point Load(kg)中心点载	1991	1308	961	748	603	495	412
Deflection(mm)变形量	8.4	18.9	33.7	52.9	76.5	104.8	137.8