


HT34直架
BOX STRAIGHT
SEGMENT

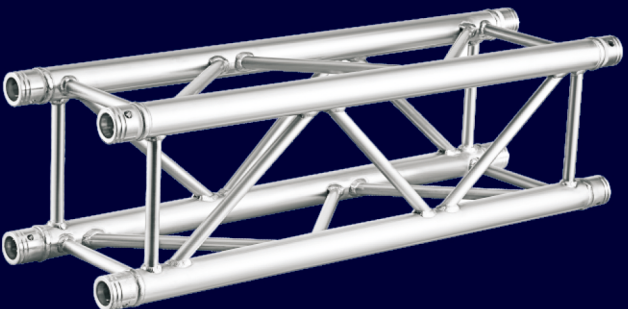

含插销套件
Connectors included

产品描述
Description

插销式桁架HT34系列
Spigot Truss HT34 Series


主管: 50x3mm(2x0.12 inch)
斜管: 20x2mm(0.8x0.08 inch)
铝合金: EN-AW 6082 T6

Main tube: 50x3mm(2x0.12 inch)
Braces: 20x2mm(0.8x0.08 inch)
Alloy: EN-AW 6082 T6

产品描述 Description	产品型号 Item Number	长度 Length	重量 Weight	规格 Specification	包装尺寸 Package(LxWxHcm)
		m	kgs	mm	
HT34直架 BOX STRAIGHT SEGMENT	HT34-50	0.5	6.24	290x290	30x30x50
	HT34-100	1	9.05	290x290	30x30x100
	HT34-150	1.5	12.18	290x290	30x30x150
	HT34-200	2	15.08	290x290	30x30x200
	HT34-250	2.5	17.98	290x290	30x30x250
	HT34-300	3	21.46	290x290	30x30x300
	HT34-350	3.5	24.24	290x290	30x30x350
	HT34-400	4	27	290x290	30x30x400
	HT34-450	4.5	28.5	290x290	30x30x450
	HT34-500	5	32.43	290x290	30x30x500

承载表 LOADING TABLE


Span(m)跨度	2m	4m	6m	8m	10m	12m
Distrib.Load(kg/m)每米均布承重	1420	707	344	193	121	82
Deflection(mm)变形量	1.7	13.3	33.2	59.8	93.9	134.8
Point Load(kg)中心点载	2840	1544	1033	771	607	491
Deflection(mm)变形量	2.7	11.7	26.7	48.3	76.2	110.1



HT34-C19

长度(L)
角度(A)
重量(W)


1m (3.28ft)
2-way 45° corner
9kgs(19.84lbs)

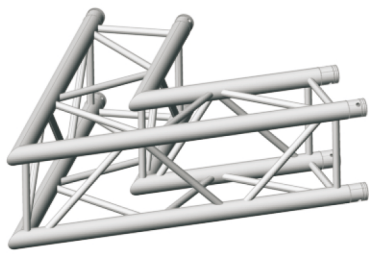

HT34-C20

长度(L)
角度(A)
重量(W)


1m (3.28ft)
2-way 60° corner
9.6kgs(21.16lbs)



HT34-C21

长度(L)
角度(A)
重量(W)


0.5m (1.64ft)
2-way 90° corner
5.6kgs(12.35lbs)

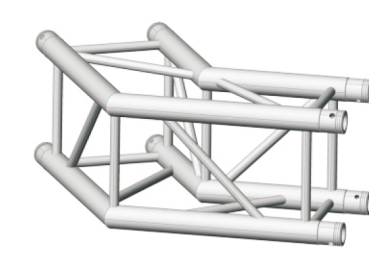

HT34-C22

长度(L)
角度(A)
重量(W)


0.5m (1.64ft)
2-way 120° corner
6.3kgs(13.89lbs)

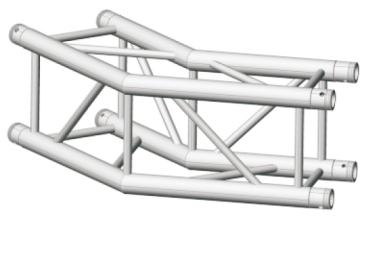

HT34-C23

长度(L)
角度(A)
重量(W)


0.5m (1.64ft)
2-way 135° corner
6.5kgs(14.33lbs)



HT34-C30

长度(L)
角度(A)
重量(W)


0.5m (1.64ft)
3-way 90° corner
7.2kgs(15.87lbs)



HT34-T35

长度(L)
角度(A)
重量(W)

0.5m (1.64ft)
3-way T-junction
6.9kgs(15.21lbs)



HT34-C41

长度(L)
角度(A)
重量(W)

0.5m (1.64ft)
4-way cross junction
8.4kgs(18.52lbs)