

F44直架
BOX STRAIGHT
SEGMENT

产品描述 Description



插销式桁架F44系列 Spigot Truss F44 Series

主管: 50x2mm(2x0.08 inch)


斜管: 25x3mm(1x0.12 inch)

铝合金: EN-AW 6082 T6

Main tube: 50x2mm(2x0.08inch)

Braces: 25x3mm(1x0.12 inch)


Alloy: EN-AW 6082 T6

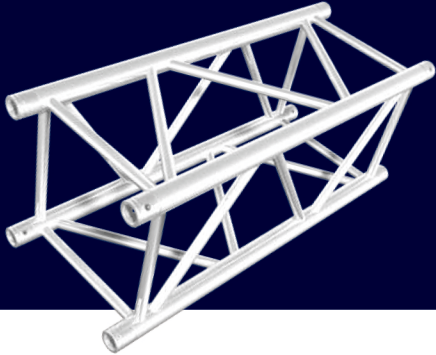


产品描述 Description	产品型号 Item Number	长度 Length	重量 Weight	规格 Specification	包装尺寸 Package(LxWxHcm)
		m	kgs	mm	
F44直架 BOX STRAIGHT SEGMENT	F44-50	0.5	6.3	400x400	41x41x50
	F44-100	1	9.5	400x400	41x41x100
	F44-150	1.5	10.1	400x400	41x41x150
	F44-200	2	13.7	400x400	41x41x200
	F44-250	2.5	15.9	400x400	41x41x250
	F44-300	3	18.4	400x400	41x41x300
	F44-350	3.5	21.3	400x400	41x41x350
	F44-400	4	23.6	400x400	41x41x400
	F44-450	4.5	26	400x400	41x41x450
	F44-500	5	28.6	400x400	41x41x500

承载表 LOADING TABLE


Span(m)跨度	2m	4m	6m	8m	10m	12m	14m	16m
Distrib.Load(kg/m)每米均布承重	1805	595	274	163	106	73	52	38
Deflection(mm)变形量	1.5	7.8	18.4	35.2	57.3	83.5	114.9	151.1
Point Load(kg)中心点载	1805	1190	823	653	532	436	364	304
Deflection(mm)变形量	1.2	6.2	14.8	28.5	46.6	68.4	94.7	124.5



F44-C19



F44-MCB



F44-C

长度(L)	1.5m (4.92ft)
角度(A)	2-way 45° corner
重量(W)	11.9kgs(26.24lbs)

长度(L)	0.29m (0.95ft)
角度(A)	Universal block
重量(W)	4.7kgs(10.36lbs)

长度(L)	Circle
角度(A)	Various diameters