


FTB-M 直架
STRAIGHT SEGMENT

产品描述 Description

螺丝式桁架 FTB-M Bolted Truss FTB-M Series

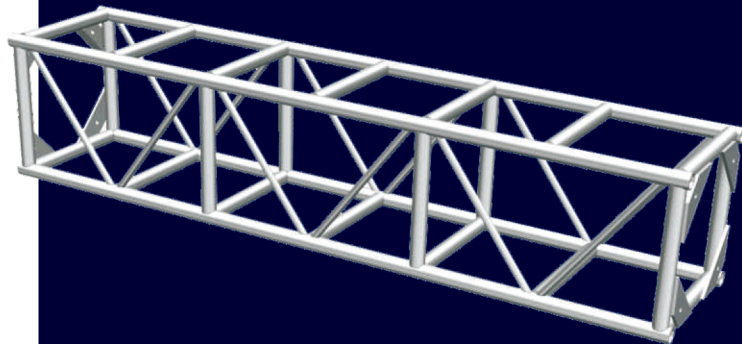

主管: 50x3mm(2x0.12 inch)

副管: 50x3mm(2x0.12 inch)

斜管: 25x3mm(1x0.12 inch)

铝合金: EN-AW 6082 T6

Main tube: 50x3mm(2x0.12 inch)

Vice tube: 50x3mm(2x0.12 inch)

Braces: 25x3mm(1x0.12 inch)

Alloy: EN-AW 6082 T6

产品描述 Description	产品型号 Item Number	长度 Length	重量 Weight	规格 Specification	包装尺寸 Package(LxWxHcm)
		m	kgs	mm	
FTB-M直架 STRAIGHT SEGMENT	FTB-M-5	1.524	30.84	520x520	53x53x155
	FTB-M-8	2.438	42	520x520	53x53x155
	FTB-M-10	3.048	51.4	520x520	53x53x155

承载表 LOADING TABLE


Span(m)跨度	1.52m	3.05m	4.57m	6.1m	7.6m	9.14m	12.2m
Distrib.Load(kg/m)每米均布承重	2324	1150	694	382	239	162	84
Deflection(mm)变形量	0.2	2	6.2	11.1	17.3	24.9	44.8
Point Load(kg)中心点载	2879	2251	1585	1166	912	739	512
Deflection(mm)变形量	0.4	2.4	5.7	10.1	15.9	22.9	41.2

角度(A)

重量(W)

Connection Box multiple ways

18.16kgs (40lb)



FTB-M-CB-6